

CONTI®V FO

Raw-edge V-belts for demanding drives, according to DIN 2215



Properties:

- temperature range from -30°C to +70°C
- very good flexibility thanks to molded teeth
- matched-set L=L (from 1000 mm)
- electrically conductive to ISO 1813 (from 3,500 mm length electrically conductive after testing)
- conditionally resistant to oil
- suitable for tropical climates
- dust-proof


Belt structure:



Profile	Length range L _i (mm)
5/-	160 - 850
6/Y	240 - 900
8/-	160 - 1115

Profile	Length range L _d (mm)
ZX	505 - 2105
AX	513 - 2697
BX	703 - 3091
CX	1132 - 3062

Comparison of products:

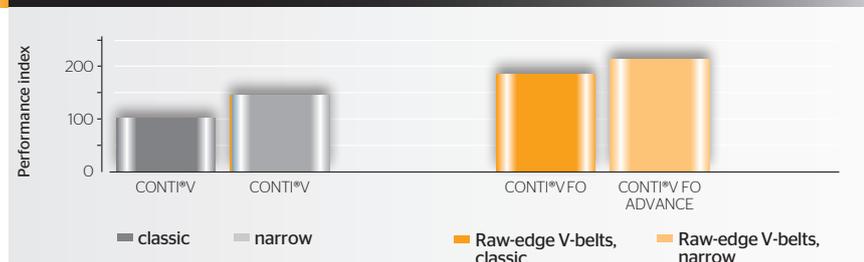

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en